


BAC系列空气过滤组合(二联件)



符号



订购码


BAC	2010	-	02	D
系列代号	壳体代号 1010 2010 3010 4010 5010		螺纹代号 M5:M5 02:1/4" 03:3/8" 04:1/2" 06:3/4" 10:1"	排水方式 空白:手动排水 A:差压排水 D:自动排水

技术参数


手动排水型	BAC1010-M5	BAC2010-02	BAC3010-02	BAC3010-03	BAC4010-04	BAC4010-06	BAC5010-06	BAC5010-10
自动排水型	BAC1010-M5D	BAC2010-02D	BAC3010-02D	BAC3010-03D	BAC4010-04D	BAC4010-06D	BAC5010-06D	BAC5010-10D
接管口径	M5×0.8	1/4	1/4	3/8	1/2	3/4	3/4	1
压力表口径	1/16	1/8	1/8	1/8	1/4	1/4	1/4	1/4
额定流量	90	500	2000	2000	4000	4500	5000	5000
环境及流体温度	5~60℃							
保证耐压力	1.5Mpa (15.3kgf/cm ²)							
最高使用压力	1.0Mpa (10.2kgf/cm ²)							
过滤孔径	5 μm							
建议用油	透平1号油							
杯材料	聚碳酸酯							
杯护防罩	BAC1000~2000(无) BAC3000~5000(有)							
调压范围	BAC1000:0.05~0.7Mpa (0.51~7.1kgf/cm ²) BAC2000~5000:0.05~0.85Mpa (0.51~8.7kgf/cm ²)							
阀型	带溢流型							
组件 过滤减压阀	BAW1000	BAW2000	BAW3000	BAW3000	BAW4000	BAW4000	BAW5000	BAW5000
组件 油雾器	BAL1000	BAL2000	BAL3000	BAL3000	BAL4000	BAL4000	BAL5000	BAL5000
重量	0.22	0.66	0.98	0.98	1.93	1.99	3.2	3.2

外形尺寸

BAC1010-2010

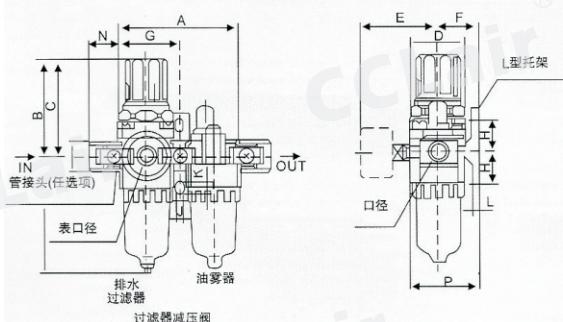

BAC3010-5010

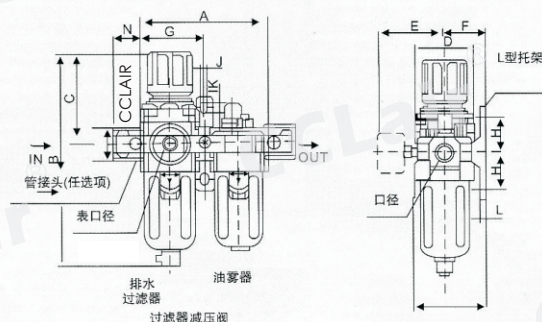

型号	口径	A	B	C	D	E	F	G	H	J	K	L	M	N	P	B
BAC1010	M5×0.8	58	109.5	50.5	25	26	25	29	20	4.5	7.5	5	18	16	38.5	130
BAC2010	1/4"	90	164.5	78	40	56.8	30	45	24	5.5	8.5	5	22	23	50	187.5
BAC3010	1/4", 3/8"	117	211	92.5	53	60.8	41	58.5	85	7	11	7	34	26	70.5	248.5
BAC4010	3/8", 1/2"	154	262.5	112	70	70.5	50	77	40	9	13	7	42	33	88	300
BAC4010-06	3/4"	164	267	114	70	70.5	50	82	40	9	13	7	46	36	88	304
BAC5010	3/4", 1	195	338	116	90	75.5	69.8	97.5	50	12	16	11	55	40	115	—